



eflex-f1-us


- Sixfold width adjustable
- Unique leg shaping and design
- Clean, crisp design
- Single-stage
- Basic or comfort handset
- 3 standard colors
- Intelligent System Protection
- 2 integrated sensors

- Brushless motor technology
- Ultra-quiet operation
- Constant speed
- Plug & Play technology
- Simple & fast set up
- Compact & e-Commerce designed packaging
- Made in EU



The eFLEX family is a range of adjustable frames that represents the perfect package for retailers and end users. Optimized for e-commerce – with flawless user experience, technology and stunning design – each frame adjusts perfectly to the needs of your business and customers. Choose between fixed-width (S-Series) and adjustable-width (F-Series) versions to suit whatever design you have in mind.

46.5 / 50.4 / 54.3 / 58.3 / 62.2 / 66.1 "	22.2 "

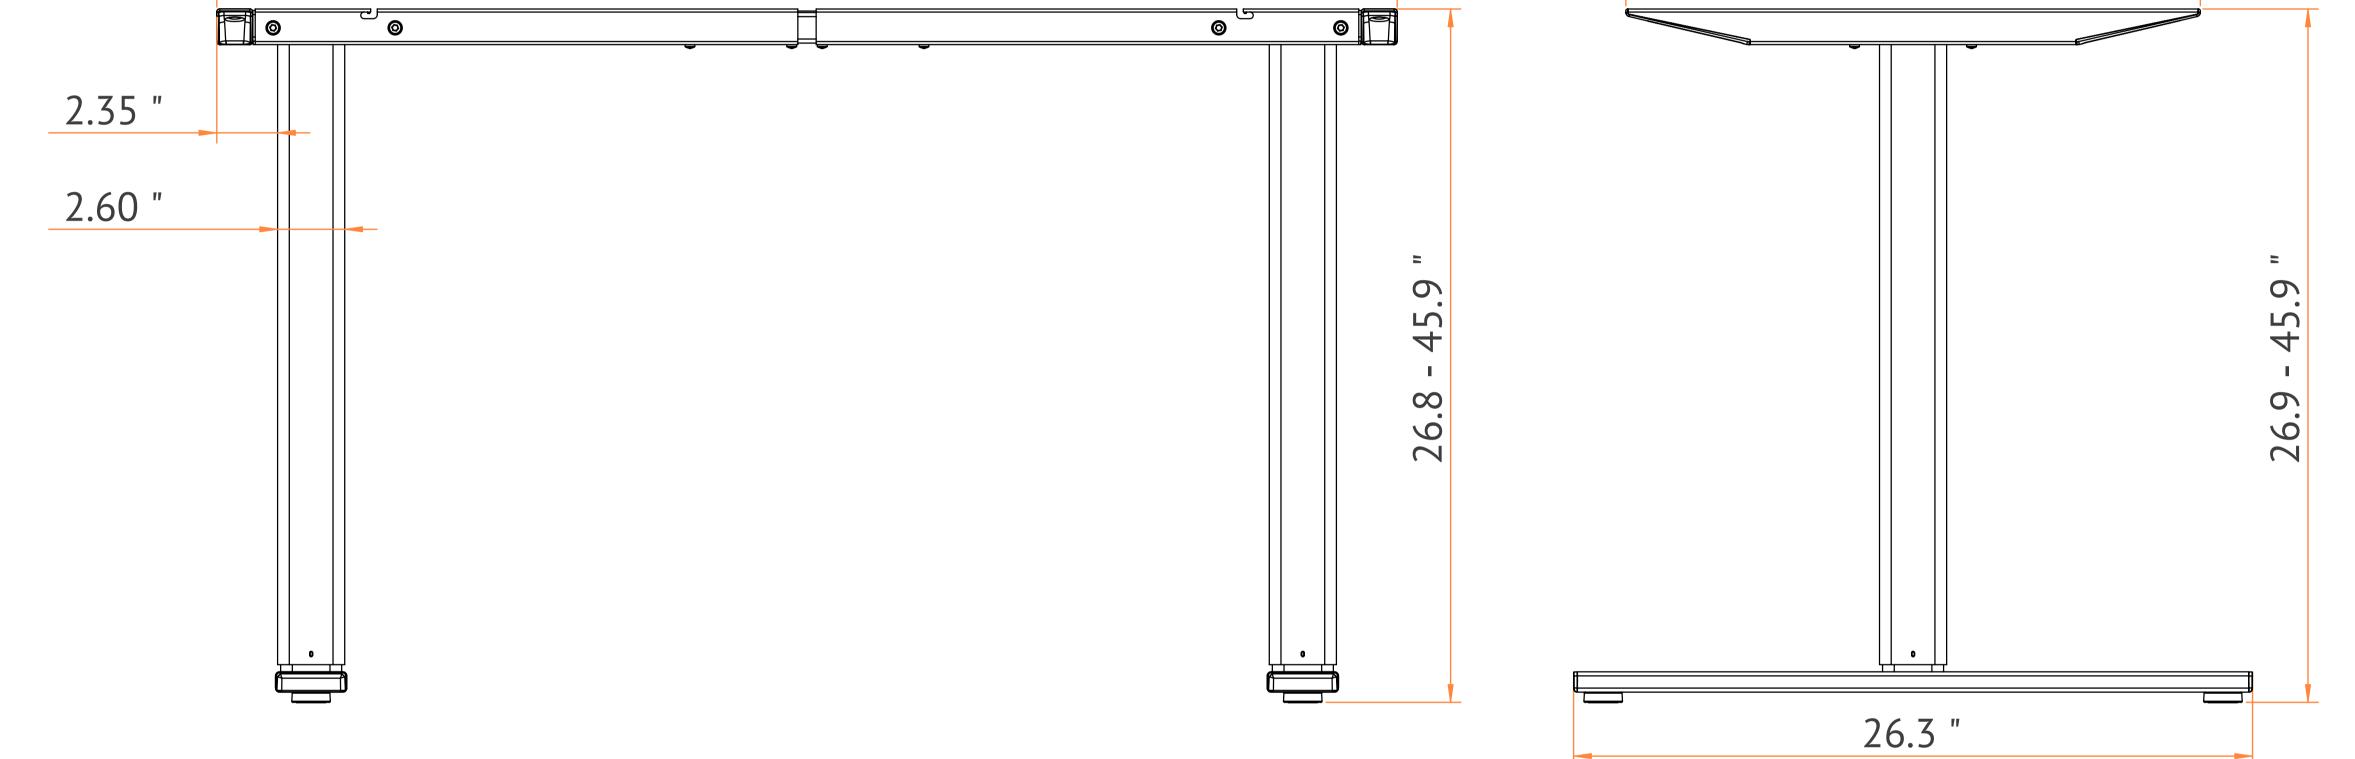

Technical Data eFLEX-F1-US

Stroke 19 inch | 483 mm

Travel range (without tabletop) 26.9 - 45.9 inch | 682 - 1165 mm Ambient conditions during transport and storage Temperature between -35°C and 85°C Temperature over 50°C only for periods not exceeding 72h Maximum relative humidity between 95% and 5% (lower allowed)

Lifting capacity (without tabletop) 220.5 lbs | 100 kg

Adjustment speed 1.5 inch/s | 38 mm/s

Weight (Frame) 51 lbs | 23 kg

Dimensions (Packaging) 44.9 x 7.5 x 8.9 inch | 1140 x 190 x 225 mm

Weight (Packaging) 57 lbs | 26 kg

Handset Options DMUI-HSM | DMUI-HSU **Ambient conditions during operation** Temperature between 5°C and 40°C Maximum relative humidity between 95% and 68%

(lower allowed)

Certificates & Standards

UL 962 Edition 4 Title 47 CFR Part 15 Subpart B BIFMA X5.5

Available Colors	
White	
Black	
Silver	

Order Code eFLEX-F1-US-WHT-STD-00 eFLEX-F1-US-BLK-STD-00 eFLEX-F1-US-SLV-STD-00

www.metmo.com

